

### Stepper motor Kann17C2nnn-ccc-K17c000

KannMOTION series

#### Product description

- Stepper motor with built in controller
- Absolut position encoder <sup>1)</sup>
- Motor driver 24VDC/1.5A <sup>2)</sup>
- Controller logic 24VDC
- Energy recovery with external resistor

#### Interfaces

- CAN-Interface



#### Benefits / Software

- Closed or open loop operation
- Fully controllable over CANopen
- Updates, Documents, Tutorials and Videos easy accessed at [www.KannMOTION.de](http://www.KannMOTION.de) (in progress)

<sup>1)</sup> Absolut position on one turn

<sup>2)</sup> Might be limited in time, restricted by losses! <Chip temperature>, take care about PCB cooling depending on application

Model	Voltage [V]	Current [A/phase]	Resistance [Ohm]	Inductance [mH]	Length A [mm]	Length L [mm]	Stroke [mm]
17C2115-150-K17c000	2.78	1.5	1.85	2.2	61 +/-1	40 +/-0.5	38.1

## Technical data


<b>Rated supply voltage (motor drive)</b>	24 VDC
<b>Rated supply voltage (Logic)</b>	24 VDC
<b>Max. motor phase current <sup>3)</sup></b>	1.5 A <sub>peak</sub> / 0.75 A <sub>RMS</sub>
<b>Ambient temperature range</b>	-10 to +40°C
<b>Connection terminals</b>	6 pole / wire max. 0.5 mm <sup>2</sup> / 6A per pin
<b>Position control accuracy</b>	+/-1°
<b>Motor control mode</b>	micro stepping up to 1/16 depending on speed

<sup>3)</sup> Might be limited in time, restricted by losses! <Chip temperature>, take care about PCB cooling depending on application

## Ordering information

Part number	Description
100 506.000	Kann17C2115-150-K17c000
201 026.000	M8-6pol Aktorkabel, konfektioniert L=1.5m

Dimensions (in mm)

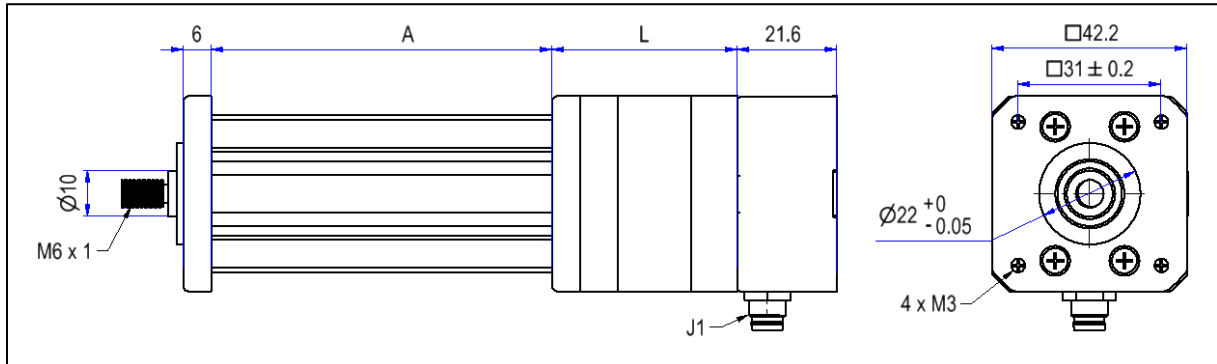

Force curves

Soon to come


Soon to come

### Connection terminals J1 (Control interface)

Pin	Description	Nominal	Absolute max	Comment
1	V <sub>motor</sub>	24 VDC	36 VDC	Supply of motor drive (Power)
2	V <sub>in</sub>	24 VDC	30 VDC	Supply of PCB logic, also for logic outputs
3	CAN-H	3.5 V	+ - 58V	CAN bus signal (not terminated)
4	CAN-L	1.5 V	+ - 58V	CAN bus signal (not terminated)
5	In1	0..24V-	30 VDC	Digital input
6	GND	-	-	Reference

Pin	Description	Wire color @ 201 026.000
1	V <sub>motor</sub>	brown
2	V <sub>in</sub>	white
3	CAN-H	blue
4	CAN-L	black
5	In1	grey
6	GND	pink

**Pin diagram male**

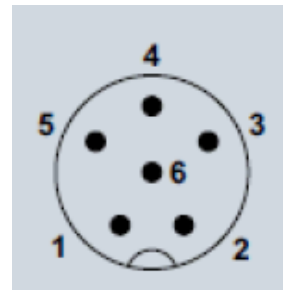

### Proper use



**Do not connect or disconnect motor during operation!**

Motor cable and motor inductivity might lead to voltage spikes when the motor is disconnected / connected while energized. These voltage spikes might exceed voltage limits of the driver MOSFETs and might permanently damage them. Therefore, always disconnect power supply before connecting / disconnecting the motor



**Keep the power supply voltage below the upper limit!**

Otherwise the driver electronics will seriously be damaged! Especially, when the selected operating voltage is near the upper limit a regulated power supply is highly recommended.



**Check your mechanical system, is it able to drive the motor, avoid motor being used as generator**

Every motor could be operated as an voltage generator, so take care about generated voltage, this might damage your electronics by overvoltage. Add some voltage limiter units to keep supply voltage in range.

### Contact information

Adlos AG  
Föhrenweg 14  
FL-9496 Balzers

Thomas Vogt  
[Thomas.Vogt@adlos.com](mailto:Thomas.Vogt@adlos.com)  
Tel: +423 263 63 63

Countries: CH, A, LI, SK, IT  
[www.adlos.com](http://www.adlos.com)

KOCO MOTION GmbH  
Niedereschacher Straße 54  
D-78083 Dauchingen

Olaf Kämmerling  
[O.Kaemmerling@kocomotion.de](mailto:O.Kaemmerling@kocomotion.de)  
Tel: +49 7720/995858-0

Countries: DE, BE, NL, LU  
[www.kocomotion.de](http://www.kocomotion.de)